

Bison started in 2015. Over a few years,  
it has become a competitive industrial and trading company.  
With excellent quality and satisfying service,  
we adhere to the spirit of craftsmen and strive for a century enterprise



Bison brand brief  
Bison always focus on good quality and servic  
Bison always supply high performance low cost products solution



TAIZHOU BISON MACHINERY INDUSTRY CO.,LTD

Add:Build D, No.1515 Fengnan East Road,jiaoJiang,


Taizhou City, Zhejiang Province,China

Tel: 0086-576-88205202

Fax: 0086-576-88017986



BUILD THE WORLD  
FOR THE BETTER

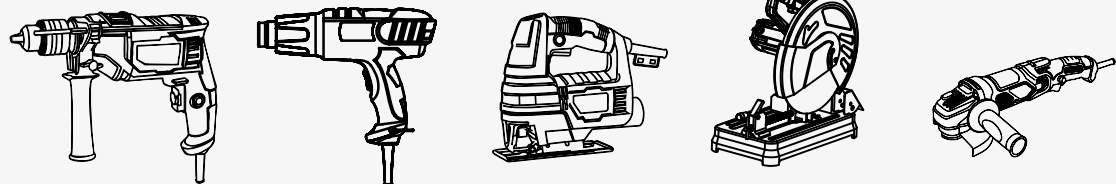

CATALOG

# MAKE POWER TOOL LIKE A WORK OF ART

We have adopted the quality-gurantee system to produce products and to satisfy customer's needs.

At the same time, we always put the complains from customers in the first place to be addressed.

Whereby, we will make every effort to provide our customers with the top quality products and the best services.



## DIRECTORY

01  
page



Cordless Tools

17  
page



Jig Saw

03  
page



Cordless Hammer Drill

19  
page



Electric Planer

04  
page



Cordless Angle Grinder

21  
page



Circular Saw

06  
page



Angle Grinder

23  
page



Miter Saw

09  
page



Drill

25  
page



Sander

12  
page



Rotary Hammer

28  
page



Gasoline Brush Cutter

15  
page



Demolition Hammer

30  
page



Gasoline Chain Saw

32  
page

Gasoline



# ABOUT US



## R&D PROCESS

**25 YEARS FOCUSED ON POWER**

**TOOLS INDUSTRY**

### TAIZHOU BISON MACHINERY INDUSTRY CO.,LTD

- is located at Jiaojiang, the Yong-Tai-Wen Highway goes through the city. It is close to Huangyan Airport, Wenzhou Airport, Haimen Port, and Ningbo Port, so it has convenient transportation and a beautiful environment.
- It is a professional manufacturer of power tools specialized in processing, manufacturing and selling power tools. The products sell well all over the country and are well received by customers with high precision, high quality and competitive price. Holding the management idea of "customer first, forge ahead", we provide customers with the best service.
- We sincerely welcome all domestic and overseas clients to our company to visit, negotiate and give instructions. We are expecting sincere cooperation with you.



# Cordless Tools

PRODUCT CATEGORIES



Cordless Drill

Taizhou bison machinery industry Co.,LTD



## BSCD1201

- ▶ No-load speed 0-350 / 0-1250 r/min
- ▶ Max. torque 25 N.m.
- ▶ Battery Li-ion (12V, 1.5Ah)
- ▶ Max. Capabilities Steel(10mm), Wood(20mm)
- ▶ Chuck 10mm keyless

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	5	40x28x26cm	



## BSCD1801

- ▶ No-load speed 0-450 / 0-1500 r/min
- ▶ Max. torque 28 N.m.
- ▶ Battery Li-ion (18V, 1.5Ah)
- ▶ Max. Capabilities Steel(14mm), Wood(28mm)
- ▶ Chuck 10mm keyless

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	5	40x28x26cm	



## BSCD12MT

- ▶ No-load speed 0-350 / 0-1350 r/min
- ▶ Max. torque 22 N.m.
- ▶ Battery Li-ion (12V, 1.3Ah)
- ▶ Max. Capabilities Steel(10mm), Wood(20mm)
- ▶ Chuck 10mm keyless

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	5	45x28x58cm	

# Cordless Hammer Drill

Taizhou bison machinery industry Co.,LTD



## BSCHD1801



- ▶ Impact rate 0-5000bpm
- ▶ Impact energy 1.3J
- ▶ Battery Li-ion (18V, 2.0Ah)
- ▶ Max. Capabilities Steel(10mm), Corcrete(13mm), Wood(16mm)
- ▶ Chuck 10mm keyless

### INDUSTRIAL


Item No.	Inner	Outer	Size
1	5	61x36x30cm	

# Cordless Angle Grinder

Taizhou bison machinery industry Co.,LTD



## BSCAG1801



- ▶ No-load speed 0-1000/7500 r/min
- ▶ Max. torque 100mm
- ▶ Battery Li-ion (18V, 4.0Ah)

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	6	61x37.5x40cm	

**BRUSHLESS**  
MOTOR TECHNOLOGY

## BSCHD1802




- ▶ No-load speed 0-1400 r/min
- ▶ Impact rate 0-4500 bpm
- ▶ Impact energy 2.1J
- ▶ Battery Li-ion (18V, 4.0Ah)
- ▶ Max. Capabilities Steel(13mm)/Concrete(22mm)/Wood(28mm)

**BRUSHLESS**  
MOTOR TECHNOLOGY

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	6	69.5x42x36cm	

## BSCAG18MT



- ▶ No-load speed 8000 r/min
- ▶ Wheel diameter 100/115mm
- ▶ Battery Li-ion (18V, 5.0Ah)

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	5	50x37.5x40cm	


# Cordless

Taizhou bison machinery industry Co.,LTD



## BSCIW1801

Cordless Impact Wrench



### BRUSHLESS MOTOR TECHNOLOGY

- ▶ No-load speed 0-2200 r/min
- ▶ Impact rate 0-3200 bpm
- ▶ Battery Li-ion (18V, 4.0Ah)
- ▶ Chuck size 1/2"
- ▶ Max. torque 280 N.m.

#### INDUSTRIAL

Item No.	Inner	Outer	Size
1	5		40x32x29cm



## BSCB1801

Cordless Blower



- ▶ No-load speed 0-18000 r/min
- ▶ Air flow 2.8 m3/min
- ▶ Battery Li-ion (18V, 4.0Ah)

#### INDUSTRIAL

Item No.	Inner	Outer	Size
1	6		43.5x32x26cm



# Angle Grinder

PRODUCT CATEGORIES




# Angle Grinder

Taizhou bison machinery industry Co.,LTD



## BSAG7001



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 710W
- ▶ No-load speed 11000r/min
- ▶ Disc size 115mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	10		47x37x23cm




# Angle Grinder

Taizhou bison machinery industry Co.,LTD



## BSAG9002




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 900W
- ▶ No-load speed 12000r/min
- ▶ Disc size 125mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	6		43.5x32x26cm



## BSAG1202




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 1150W
- ▶ No-load speed 11000r/min
- ▶ Disc size 125mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	10		48x40x24cm



## BSAG1201




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 1200W
- ▶ No-load speed 12000r/min
- ▶ Disc size 125mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	6		44x44x25cm



## BSAG9001




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 900W
- ▶ No-load speed 11000r/min
- ▶ Disc size 115mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	10		65x34x21.5cm



## BSAG2301



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 2300W
- ▶ No-load speed 6500r/min
- ▶ Disc size 230mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	2		55x29.5x17cm



# Drill

PRODUCT CATEGORIES

# IMPACT DRILL




## Drill

Taizhou bison machinery industry Co.,LTD

### BSED5001

Electric Drill




- ▶ Rated Voltage            220-240V~50/60Hz
- ▶ Rated Input Power:        500W
- ▶ No-load speed            0-3000r/min
- ▶ Disc size                    10mm

#### INDUSTRIAL

Item No.	Inner	Outer	Size
1	10	50x38x25cm	

### BSID7001

Impact Drill



- ▶ Rated Voltage            220-240V~50/60Hz
- ▶ Rated Input Power:        710W
- ▶ No-load speed            0-3000r/min
- ▶ Disc size                    13mm

#### INDUSTRIAL

Item No.	Inner	Outer	Size
1	10	59x40x26cm	




# Impact Drill

Taizhou bison machinery industry Co.,LTD



## BSID7501

Impact Drill



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 750W
- ▶ No-load speed 0-3000r/min
- ▶ Disc size 13mm


### INDUSTRIAL

Item No.	Inner	Outer	Size
1	10	62x38x27cm	



## BSID8001

Impact Drill



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 850W
- ▶ No-load speed 0-2700/1000r/min
- ▶ Disc size 13mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	5	47x38x28cm	



# Rotary Hammer

PRODUCT CATEGORIES



## BSRH5001



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 500W
- ▶ No-load speed 0-850r/min
- ▶ Impact rate 0-3900 /min
- ▶ Impact energy 1.7J

### INDUSTRIAL

Item No.	Inner	Outer	Size
729954504012	1	5	56x39x30cm



# Rotary Hammer

Taizhou bison machinery industry Co.,LTD



## BSRH6001



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 620W
- ▶ No-load speed 0-870r/min
- ▶ Impact rate 0-4850 /min
- ▶ Impact energy 2.6J

### INDUSTRIAL

Item No.	Inner	Outer	Size
729954504029	1	5	58x45x29cm



## BSRH8001



- ▶ Rated Input Power: 800W
- ▶ No-load speed 0-1100r/min
- ▶ Impact rate 0-4000 /min
- ▶ Impact energy 2.9J

### INDUSTRIAL

Item No.	Inner	Outer	Size
729954504036	1	5	58x45x29cm



# Rotary Hammer

Taizhou bison machinery industry Co.,LTD



## BSRH9001



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 900W
- ▶ No-load speed 0-1450r/min
- ▶ Impact rate 5350mm
- ▶ Impact energy 3.1J

### INDUSTRIAL

Item No.	Inner	Outer	Size
729954504050	1	3	60x42x32cm



## BSRH9002



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 900W
- ▶ No-load speed 850r/min
- ▶ Impact rate 4200/mm
- ▶ Impact energy 5.0J

### INDUSTRIAL

Item No.	Inner	Outer	Size
729954504050	1	3	45x37x35cm



## BSRH1501



- ▶ Rated Input Power: 1500W
- ▶ No-load speed 900r/min
- ▶ Impact rate 4300/mm
- ▶ Impact energy 5.2J

### INDUSTRIAL

Item No.	Inner	Outer	Size
729954504067	1	3	45x40x37cm



# Demolition Hammer

PRODUCT CATEGORIES



**Demolition Hammer**  
Taizhou bison machinery industry Co.,LTD

**BSDH1601**



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 1600W
- ▶ Impact rate 1800 /min
- ▶ Impact energy 43J



**INDUSTRIAL**


Item No.	Inner	Outer	Size
729954504074	1	1	71.5x31x17cm



**BSDH1701**



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 1750W
- ▶ Impact rate 0-1300 /min
- ▶ Impact energy 45J

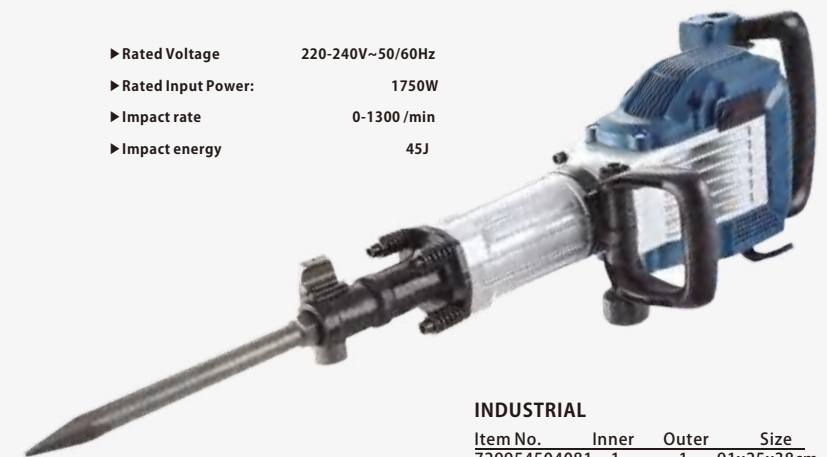

**INDUSTRIAL**

Item No.	Inner	Outer	Size
729954504081	1	1	91x25x38cm



# Jig Saw

PRODUCT CATEGORIES



## BSJS8001



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 800W
- ▶ Impact rate 0- 3000 r/min
- ▶ Max. cutting depth 80mm


**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	10	52x42x24cm	



## BSJR70

Jig Saw/Reciprocating Saw



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power: 700W
- ▶ Impact rate 0- 3000 r/min
- ▶ Max. cutting depth 70mm

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	10	47x37x23cm	



# Electric Planer

PRODUCT CATEGORIES



**Electric Planer**  
Taizhou bison machinery industry Co.,LTD

## BSEP5001



▶ Rated Voltage	220-240V~50/60Hz	<b>INDUSTRIAL</b>			
▶ Rated Input Power	500W	Item No.	Inner	Outer	Size
▶ No-load speed	16000r/min	1	6	55x33x38cm	
▶ Planning size	82*1mm				<input type="checkbox"/>



## BSEP5002




▶ Rated Voltage	220-240V~50/60Hz	<b>INDUSTRIAL</b>			
▶ Rated Input Power	560W	Item No.	Inner	Outer	Size
▶ No-load speed	16000r/min	1	6	55x33x38cm	
▶ Planning size	82*1mm				<input type="checkbox"/>



# Miter Saw

PRODUCT CATEGORIES




## BSMS1501

- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 2000W
- ▶ No-load speed 5500r/min
- ▶ Blade diameter 255mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	1	1	59x45x42cm




## BSMS1801

- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 1800W
- ▶ No-load speed 5000r/min
- ▶ Blade diameter 255mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	1	1	56x45x38.5cm



## BSCM2501

- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 2500W
- ▶ No-load speed 3900r/min
- ▶ Blade diameter 355mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	1	1	59x36x42.5cm




# Circular Saw

PRODUCT CATEGORIES



**Circular Saw**  
Taizhou bison machinery industry Co.,LTD

## BSCS1401




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 1380W
- ▶ No-load speed 5300r/min
- ▶ Blade diameter 185mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	4	47x33x41cm	



## BSCS1501



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 1500W
- ▶ No-load speed 5000r/min
- ▶ Blade diameter 185mm


### INDUSTRIAL

Item No.	Inner	Outer	Size
1	2	51.5x36x27cm	





**BSBS1201** Belt Sander





- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 1200W
- ▶ No-load speed 500r/min
- ▶ Belt size 100\*610mm

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	2		39x39x30.5cm



**BSMC1201** Marble Cutter

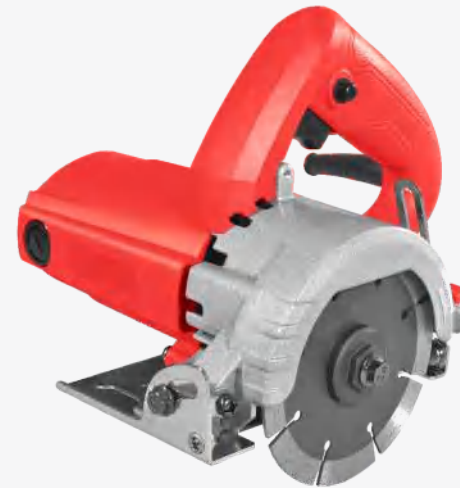


- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 1250W
- ▶ No-load speed 0-13000r/min
- ▶ Disc diameter 110mm

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	6		66x24x38cm



**BSES3001** Electric Sander




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 380W
- ▶ No-load speed 5000-12000r/min
- ▶ Pad size 125mm

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	5		80x35x22cm



**BSDS7001** Drywall Sander




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 710W
- ▶ No-load speed 1200-2200r/min
- ▶ Pad size 180mm

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	4		55x28x53cm



**BSMF3001**  
Oscillating Tool/Multi function tool




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 300W
- ▶ No-load speed 15000-22000r/min
- ▶ Oscillating angle 3 degree

**INDUSTRIAL**

Item No.	Inner	Outer	Size
1	12		50x34x23cm



**BSDS7501** Drywall Sander



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 750W
- ▶ No-load speed 1000-1850r/min
- ▶ Pad size 225mm
- ▶ Rod length 135-180cm

**INDUSTRIAL**


Item No.	Inner	Outer	Size
1	1	1	101x32x22cm







## BSIW9001 Impact Wrench



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 900W
- ▶ No-load speed 2300r/min
- ▶ Max torque 350 N.m.
- ▶ Drive Square 1/2"

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	5		62x35x33cm



## BSHG2001 Heat Gun




- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 2000W
- ▶ Temperature 450° C, 600° C
- ▶ Air flow 300L/m, 500L/m

### INDUSTRIAL

Item No.	Inner	Outer	Size
1	8		56x38x31cm



## BSEB6501 Electric Blower



- ▶ Rated Voltage 220-240V~50/60Hz
- ▶ Rated Input Power 650W
- ▶ No-load speed 0-14000r/min
- ▶ Air flow 3.0 m3/min



### INDUSTRIAL

Item No.	Inner	Outer	Size
1	6		61x32x37cm



# Gasoline Brush Cutter

PRODUCT CATEGORIES



# Gasoline Brush Cutter

Taizhou bison machinery industry Co.,LTD



## BSGBC43



2-stroke,Air-Cooled,Single Cylinder


- ▶ Displacement 43cc
- ▶ Power 1.25Kw/7500rpm
- ▶ Fuel tank capacity 1200ML
- ▶ Mixture fuel ration 1:25:00
- ▶ Cutting head metal blade or nylon head
- ▶ Working pole length 1650mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
Engine	1	1	36x23x30cm
Shaft rod	1	1	165x11x11cm



## BSGBC52



2-stroke,Air-Cooled,Single Cylinder

- ▶ Displacement 52cc
- ▶ Power 1.65Kw/7500rpm
- ▶ Fuel tank capacity 1200ML
- ▶ Mixture fuel ration 1:25:00
- ▶ Cutting head metal blade or nylon head
- ▶ Working pole length 1650mm

### INDUSTRIAL

Item No.	Inner	Outer	Size
Engine	1	1	36x23x30cm
Shaft rod	1	1	165x11x11cm



# Gasoline Chain Saw

PRODUCT CATEGORIES



# Gasoline Chain Saw

Taizhou bison machinery industry Co.,LTD



## BSGC5801



2-stroke,Air-Cooled,Single Cylinder



- ▶ Displacement 58cc
- ▶ Power 2.5Kw
- ▶ Idling speed 3000 r/min
- ▶ Fuel tank capacity 550ML
- ▶ Oil tank capacity 260ML
- ▶ Optional bar size 20",22"



### INDUSTRIAL

Item No.	Inner	Outer	Size
1	1	1	50.5x25.5x30cm

## BSGC5802

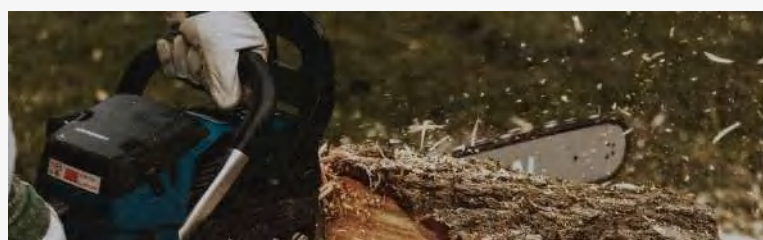

2-stroke,Air-Cooled,Single Cylinder

- ▶ Displacement 58cc
- ▶ Power 2.5Kw
- ▶ Idling speed 3000 r/min
- ▶ Fuel tank capacity 550ML
- ▶ Oil tank capacity 260ML
- ▶ Optional bar size 20",22"



### INDUSTRIAL

Item No.	Inner	Outer	Size
1	1	1	50.5x25.5x30cm

# Gasoline Generator

PRODUCT CATEGORIES





SC



W



S



**EASY START, COMPACT, FUEL-EFFICIENT PROVIDE SMOOTH, CLEAN POWER;  
AC/DC OUTPUT & CABLES FOR 12V BATTERIES CHARGING.**

GASOLINE GENERATOR	BS950	BS1800	BS2500	BS3000	BS3500
Rated Voltage(V)	110/220, 220/380, 230/400, 240/415				
Rated Current(A)	5.9/2.9	9.0/4.5	18/9.1	22.7/11/6.2	26/13/7
Max.Power(KW)	0.75	1.2	2.2	2.8	3.0
Rated Power COP(KW)	0.65	1	2.0	2.5	2.8
Phase	1	1	1/3	1/3	1/3
Rated Frequency(Hz)	50/60	50/60	50/60	50/60	50/60
Factor	1	1	1	1	1
Insulation grade	F	F	F	F	F
Model	1E45F	BS156F	BS168F-1	BS170F	BS170F
Type	Single Cylinder,Air-cooled,2-stroke	Single Cylinder,Air-cooled,4-stroke			
Displacement(cc)	63	93.5	196	210	210
Output power(HP)	2.0	2.6	6.5	7.0	7.0
Rated speed(RPM)	3000/3600				
Bore X stroke	45*38	56*38	68*45	70*56	70*56
Compression ratio	7.3	7.7	8.5	8.5	8.5
Starting system	Recoil/Electric Starting				
Fuel tank volume(L)	4	6	15	15	15
Mass weight(kg)	19	26	41.5	43	45
Size(LxWxH)(mm)	420*340*325	490*380*400	605*470*435	605*470*435	605*470*435
20GP(Set)	735	350	235	235	235
40HQ(Set)	1720	900	593	585	585

GASOLINE GENERATOR	BS4500SC	BS5500SC	BS6500SC	BS7500SC
Rated voltage(V)	110/220, 220/380, 230/400, 240/415			
Rated current(A)	27.2/13.5/7.5	32/18.2/7	32/23/12.5	32/27/15
Max power(KW)	3.5	4.5	5.5	6.5
Rated power(KW)	3.0	4.0	5.0	6.0
Phase	1/3	1/3	1/3	1/3
Rated frequency(Hz)	50/60	50/60	50/60	50/60
Factor	1	1	1	1
Insulation grade	F	F	F	F
Model	BS177F	BS188F	BS188F	BS190F
Type	Single Cylinder, Air-cooled, 4-stroke			
Displacement(cc)	270	389	389	420
Output power(HP)	9.0	13.0	13.0	15.0
Rated speed(RPM)	3000/3600	3000/3600	3000/3600	3000/3600
Bore×stroke(mm)	77*58	88*64	88*64	90*66
Compression ratio	8.2	8.0	8.0	8.0
Starting system	Recoil/Electric Starting			
Fuel tank volume(L)	25	25	25	25
Mass weight(kg)	72	80	82	85
Size(L×W×H)(mm)	710*530*550	710*530*550	710*530*550	710*530*550
20FT	136	136	136	136
40HQ	292	292	292	292



# HIGH PRESSURE WASHER

PRODUCT CATEGORIES



PROFESSIONAL HIGH PRESSURE NOZZLES. HIGH PRESSURE HOSE WITH QUICK CONNECT FOR FAST ASSEMBLY. SELF SUCTION FUNCTION FOR YOUR OPTION.

HIGH PRESSURE WASHER	BS-170 D/NB	BS-180 D/NB
Power	6.5HP	6.5HP
Speed	3400	3400
Working pressure	154-170Bar	164-180Bar
Flow	9LPM	9LPM
Foaming bottle capacity	2L/6L	2L/6L
G.W.(kg)	30/38	32/39
Dimension(mm)	595*530*580/810*450*535	595*530*580/840*440*520
20GP(Set)	168/140	168/140
40HQ(Set)	344/350	344/350



# GASOLINE WATER PUMP

PRODUCT CATEGORIES



○ ALUMINUM ALLOY HIGH PRESSURE CASTING.BIG VOLUME WATER DISCHARGE.  
HIGH EFFECTIVE MECHANICAL SEAL.COMPACT IN STRUCTURE AND LIGHT IN WEIGHT.

GASOLINE WATER PUMP	BS15	BS20	BS30	BS40A	BS40B
Inlet and outlet size(mm)	40(1.5'')	50(2.0'')	80(3.0'')	100(4.0'')	100(4.0'')
Pump lift(m)	20	28	30	25	30
Suction height(m)	7	8	8	7	8
Flux(m <sup>3</sup> /h)	20	36	60	75	90
Model	BS156F	BS168F-1	BS168F-1	BS170	BS177F
Type	Single Cylinder, Air-cooled, 4-stroke				
Displacement(cc)	93.5	196	196	210	270
Max power(KW)	2.0	5.2	5.2	5.6	7.2
Rated power(KW)	1.8	4.7	4.7	5.1	6.6
Rated speed(RPM)	3000/3600	3000/3600	3000/3600	3000/3600	3000/3600
Bore×stroke(mm)	56*38	68*54	68*54	70*54	77*58
Compression ratio	7.7	8.5	8.5	8.5	8.2
Fuel tank volume(L)	1.6	3.6	3.6	3.6	6.5
Mass weight(kg)	22	28	30	39	49
Size(L×W×H)(mm)	420*335*335	488*390*408	510*390*431	605*435*480	635*455*545
20GP(Set)	686	385	330	160	144
40GP(Set)	1568	900	828	402	375